

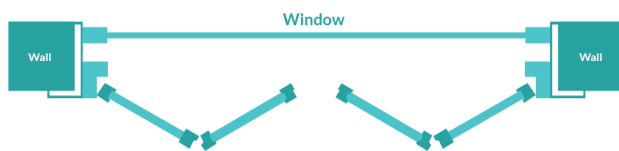
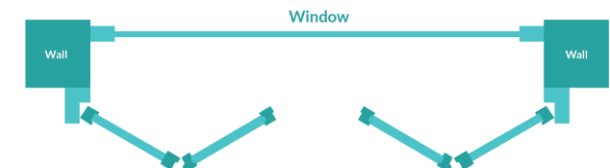


1. Choosing where to Mount your Shutters

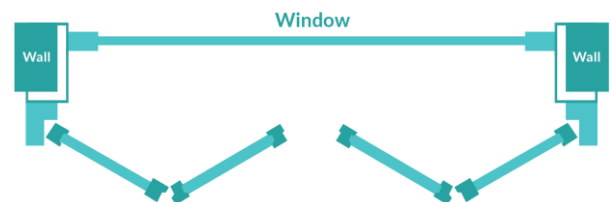

are using the traditional front mounted tilt wand

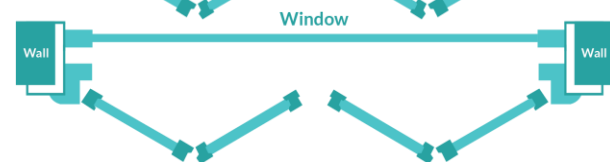

Inside Mount L-Frame

You should use this option if you have timber architraves around your window and enough depth in the recess to fit your shutters

Depth / Clearance needed for this mount type is **70mm** if you are using the hidden tilt mechanism

Depth / Clearance needed for this mount type is **65mm** if you

Inside Mount Z-Frame (No Architraves)

The Z-Frame is very generous in allowing for out of square windows as the lip curves around the opening of the window blocking any potential light gaps. You should choose this method every time if you have no window architraves (timber frame around your window) and enough depth. **This option can still be used and mounted over, if you have architraves that are completely flat with a square corner**

Depth / Clearance needed for this mount type is **50mm** if you are using the traditional front mounted tilt wand

Depth / Clearance needed for this mount type is **58mm** if you are using the hidden tilt mechanism

Outside Mount L-Frame

Use this option if you have obstructions within the recess, and not enough depth.

If fixing onto your architrave, you will require a flat outer corner surface on your architrave of about 20mm to mount the screws and L bracket

U-Channel (No Picture)

Used for room divider wall openings, very popular in a lot of the newer homes. Two U Channels on the top and the bottom will fix the shutters in position as hinging is not required. This method offers a very simple installation, good light block and very neat presentation when viewed from either side of the wall opening.

2. Measuring for your Shutters

Your Measurements are covered* by our **SureFit™ Guarantee**

If you need to ask any questions, call, talk with us via live chat, or send us an e-mail, we'll be happy to help

First make sure that your windows are square enough

Measure your window opening diagonally from the top left corner to the bottom right corner. Then measure from the top right corner to the bottom left corner. If the two measurements vary by more than 12mm then shutters will not be suitable for your window, but there are still plenty of other products to choose from!

If Measuring for Recess Z Frame, L Frame, or U-Channel

First determine if you have enough depth to mount your shutters in the recess

For Z-Frame Recess Mount **50mm is required** if you are using the **traditional front mounted tilt wand**


For Z-Frame Recess Mount **58mm is required** if you are using the **hidden tilt mechanism**

For L-Frame Recess Mount **70mm is required** if you are using the **hidden tilt mechanism**

For L-Frame Recess Mount **65mm is required** if you are using the **traditional front mounted tilt wand**

For **U-Channel** in a wall opening Recess Mount at least **45mm** of top and bottom surface in your opening is needed to mount the U-Channels

Watch out for any obstructions such as window mullions, window winders, handles, protruding window frame, etc

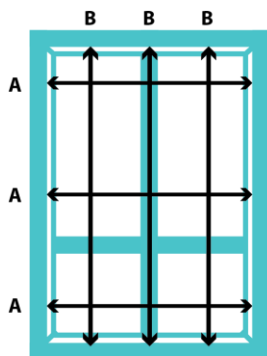


A. Measure the width in mm's in three places, Top, Centre and Bottom. Measure from the inside opening edge of the recess to the opposite edge. Use the smallest of the three measurements.

B. Measure the drop in mm's in three places, Left, Centre and Right. Measure from the top of the opening of the inside recess to the bottom of the inside sill. Use the smallest of the three measurements.

Important DO NOT make any deductions or allowances on your **Recess Fit** measurements as our factory will do this to ensure a perfect fit


Important for recess Z-Frames If you have a protruding sill at the base of the window, measure the drop to the top of the sill, and make sure you select the "Yes" option on "Have protruding window sill" on the shutter order page, a special bottom 'Sill L frame' will sit nearly on top,

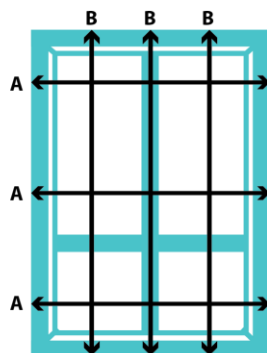

If Measuring for Face Mount L-Frame with an Architrave

A. Measure the width in mm's in three places, Top, Centre and Bottom. Measure from the outer edge of the architrave to the opposite edge. Use the smallest of the three measurements

B. Measure the drop in mm's in three places, Left, Centre and Right. Measure from the top of the architrave, to the bottom of the architrave. Use the smallest of the three measurements.

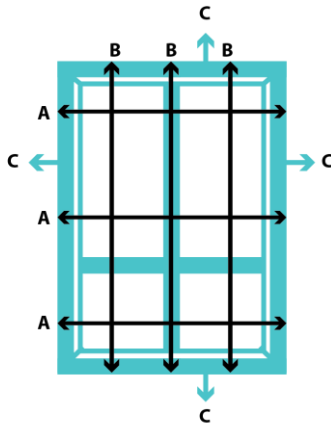

Measuring for Face Mount L-Frame without an Architrave

- A.** Measure the width in three places, Top, Centre and Bottom. Measure from the left hand opening edge of the plaster to the opposite edge. Use the smallest of the three measurements.
- B.** Measure the drop in three places, Left, Centre and Right. Measure from the top of the opening edge of the plaster to the bottom opening edge. Use the smallest of the three measurements.
- C.** Add 42mm on each side (84mm total added to width and 84mm total added to drop) if you have no protruding window sill base otherwise Add 42mm on each side except bottom (84mm total added to width and 42mm total added to drop) if you have a protruding window sill base

Measuring points to remember

1. Always use a **metal tape measure**, a cloth tape measure will not be accurate
2. We require all of your measurements in **millimetres**
3. Measure **width then drop** in this order, try not to get these mixed up
4. Measure every window, there might be slight variations even if they are duplicate windows and this could affect your window furnishings fitting perfectly
5. Do not take your measurements from house plans as they are not accurate
6. If measuring with a partner, make sure the measurements are repeated out loud as they are written down
7. Double, and triple check all details are correct before ordering to avoid delays if we have to replace any of your products, **remember not to deduct anything off any Recess Fit measurements** as our factory will do this to ensure a perfect fit
8. For your reference, architraves are the timber frame or otherwise known as window trims around your window opening