




MYDIRECT
BLINDS
.com.au

Pinch Pleat Track Joining Instructions

1.

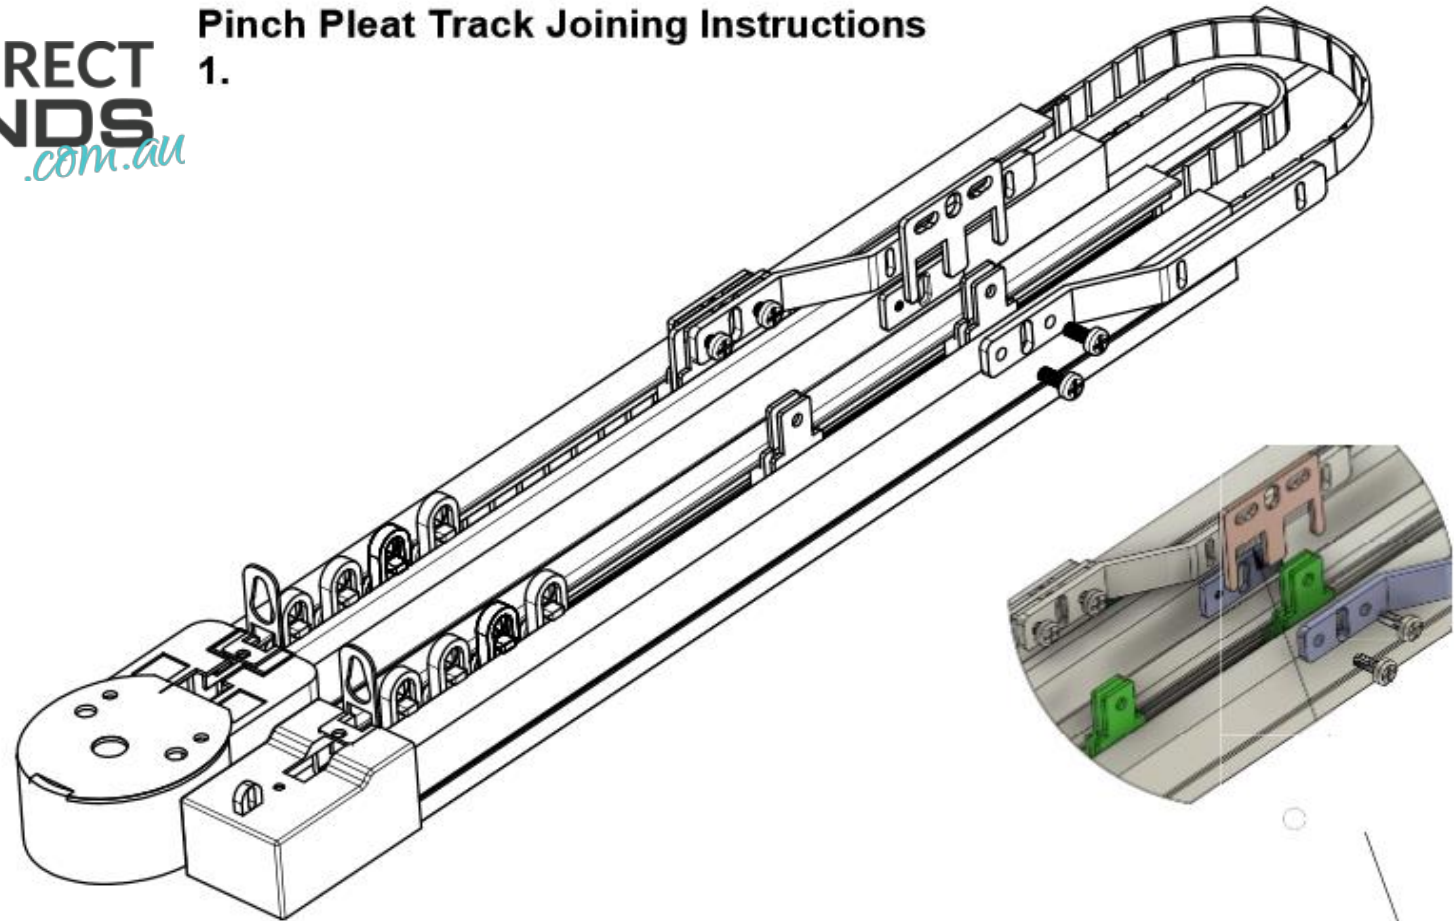



A. When you receive your track it will be folded in half with the Master Carrier separated like this.

The coloured pieces in the diagram represent the components that make up the Master Carrier assembly used to join the Drive Belt together.

Please Do Not Lose These Parts.

Pinch Pleat Track Joining Instructions

2.

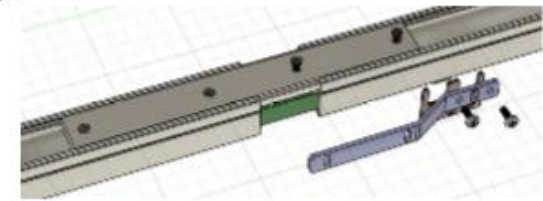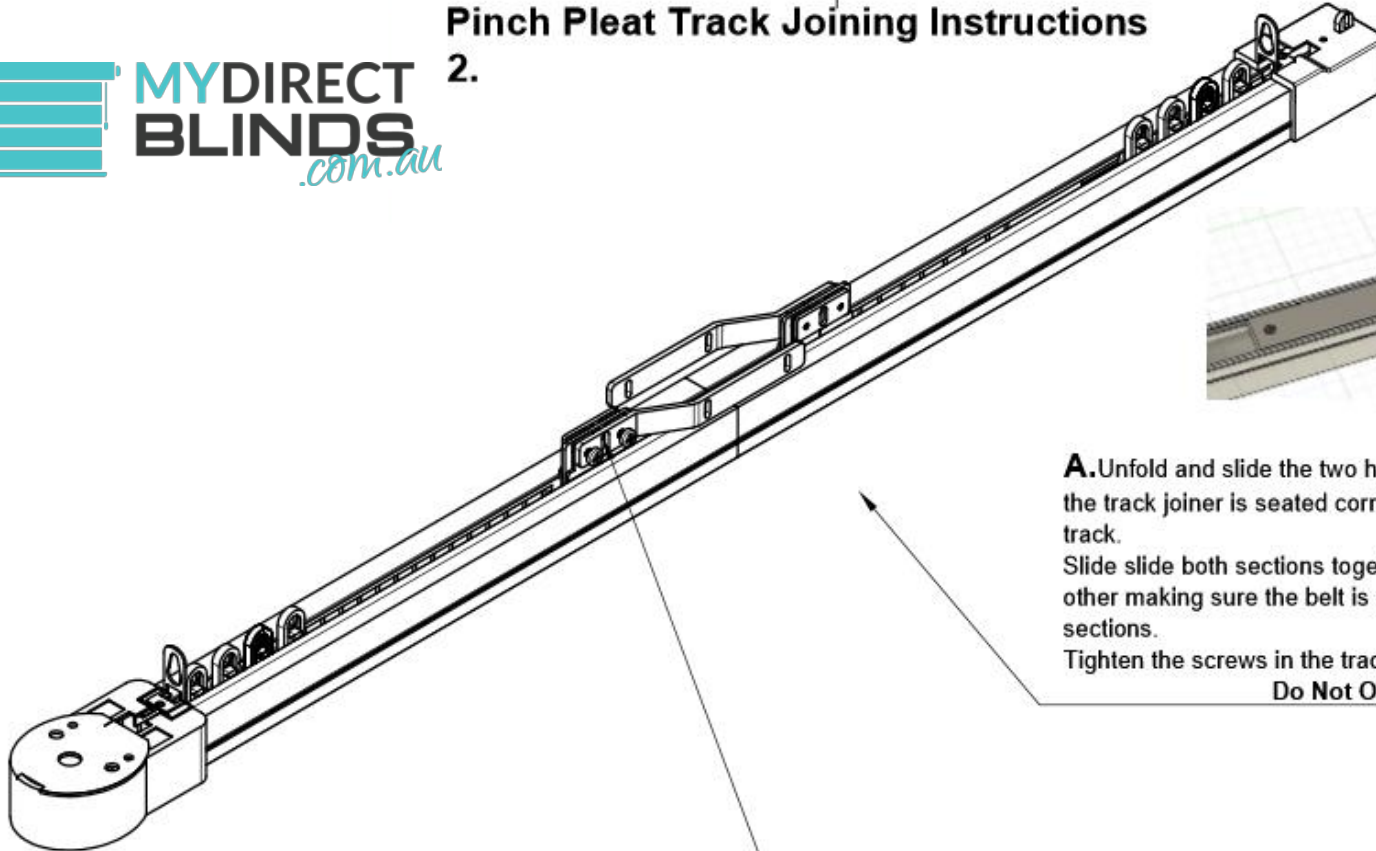


A. Unfold and slide the two halves of the track together ensuring the track joiner is seated correctly into the back channel of the track.


Slide slide both sections together so they are butting up to each other making sure the belt is not pinched between the two sections.

Tighten the screws in the track joiner until they are firm.

Do Not Over Tighten.

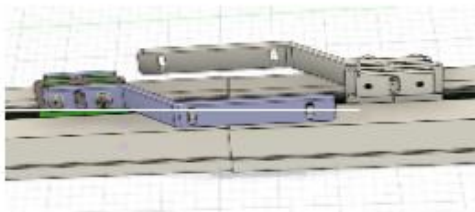

This what the assembled Master Carriers should look like.

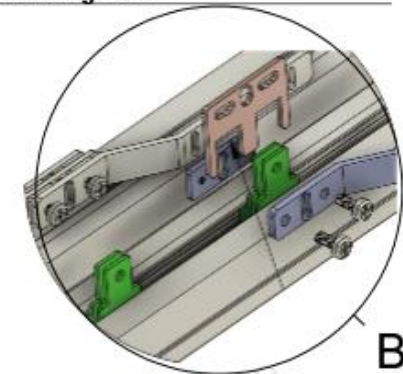

B. Flip the track back over, now pull the two halves of the Master Carrier together (Green) and push the Connecting plate into place. Now that the two halves of the Master Carrier are connected you can assemble the remaining components as shown using the screws provided. Tighten the screws until firm and the track is now ready for use.